


# FALLING UP ROUND 7 alu pol

warmDIM


DC02-0

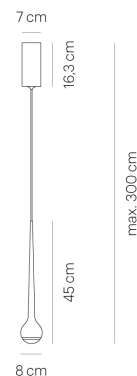

## TECHNICAL SPECIFICATIONS

Lamp holder	LED
Mounting method	ceiling-mounted (surface)
warmDIM	Yes
Light emission	direct
Light distribution	symmetric
Level of light output efficiency	100 %
Luminaire luminous flux	770 lm
Color temperature	2700-2200 K
Colour rendering index (CRI)	> 90
Beam angle	25
White impression	warm white
Rated voltage (range)	220-240 V / 120 V
Power frequency	50/60 Hz
Power consumption (maximum)	11 W
Surface	polished
Housing material	aluminium
Type of lamp control gear	Driver
Ballast included	Yes
Protection class	I
Connection cable (number of cores)	3
Number of lampheads	1
Energy efficiency	A - A++
Dimmable	Yes
Type of Dimmer	Phase cutting (electronic)
Width	80 mm
Height	450 mm
Diameter	80 mm
Head adjustable	No
Height adjustable	No
Suspension length	-/2500 mm
Net weight	1,10 kg

## LIGHT DIAGRAM

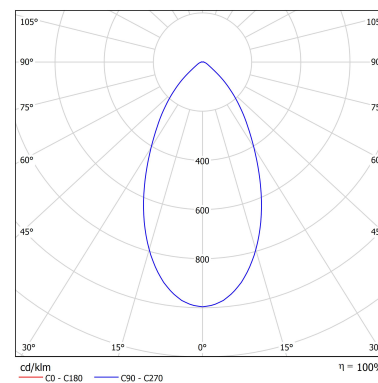

**tobias grau**